



Lamiere grecate zincate da solaio

Disponibili lunghezze 5 e 6mt, su richiesta taglio o produzione a misura


Nome	Misure			Peso
	misura 1	misura 2	spessore	
	mm	mm	mm	

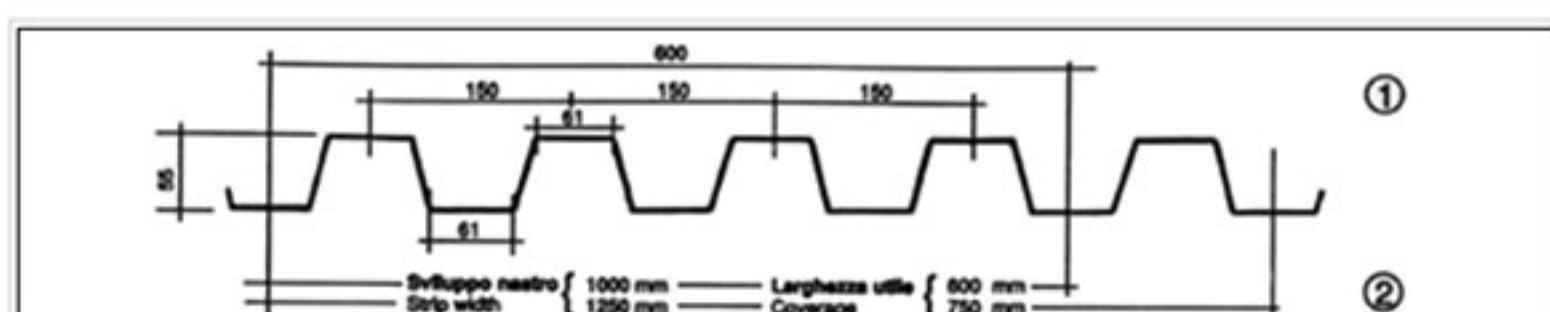


EGB 210/D	600	1000	0.6	7.85
EGB 210/D	600	1250	0.6	7.85
EGB 210/D	600	1500	0.6	7.85
EGB 210/D	600	1000	0.7	9.15
EGB 210/D	600	1250	0.7	9.15
EGB 210/D	600	1500	0.7	9.15
EGB 210/D	600	1000	0.8	10.46
EGB 210/D	600	1250	0.8	10.46
EGB 210/D	600	1500	0.8	10.46
EGB 210/D	600	1000	1.0	13.08
EGB 210/D	600	1250	1.0	13.08
EGB 210/D	600	1500	1.0	13.08
EGB 210/D	600	1000	1.2	15.7
EGB 210/D	600	1250	1.2	15.7
EGB 210/D	600	1500	1.2	15.7
EGB 210/D	600	1000	1.5	19.62
EGB 210/D	600	1250	1.5	19.62
EGB 210/D	600	1500	1.5	19.62

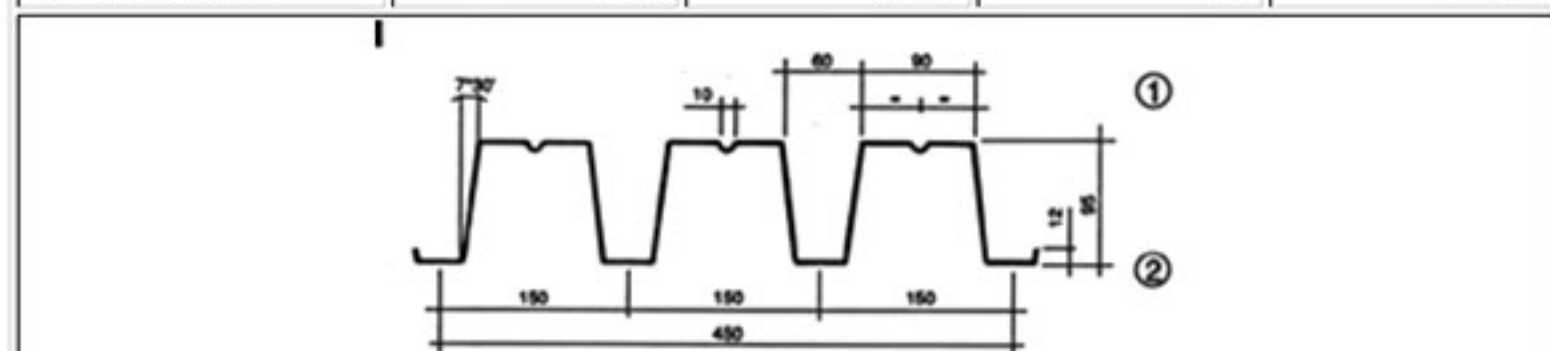

EGB 1001/D	450	1000	0.6	10.46
EGB 1001/D	450	1000	0.7	12.2
EGB 1001/D	450	1000	0.8	13.95
EGB 1001/D	450	1000	1.0	17.44
EGB 1001/D	450	1000	1.2	20.94
EGB 1001/D	450	1000	1.5	26.17

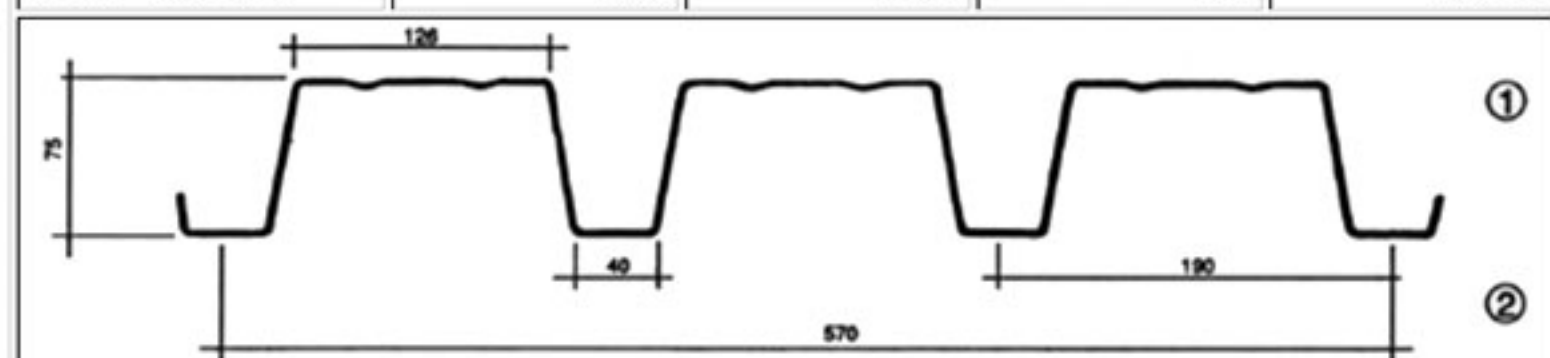

EGB 1200/D	570		0.6	8.26
EGB 1200/D	570		0.7	9.64
EGB 1200/D	570		0.8	11.02
EGB 1200/D	570		1.0	13.77
EGB 1200/D	570		1.2	16.53
EGB 1200/D	570		1.5	20.66

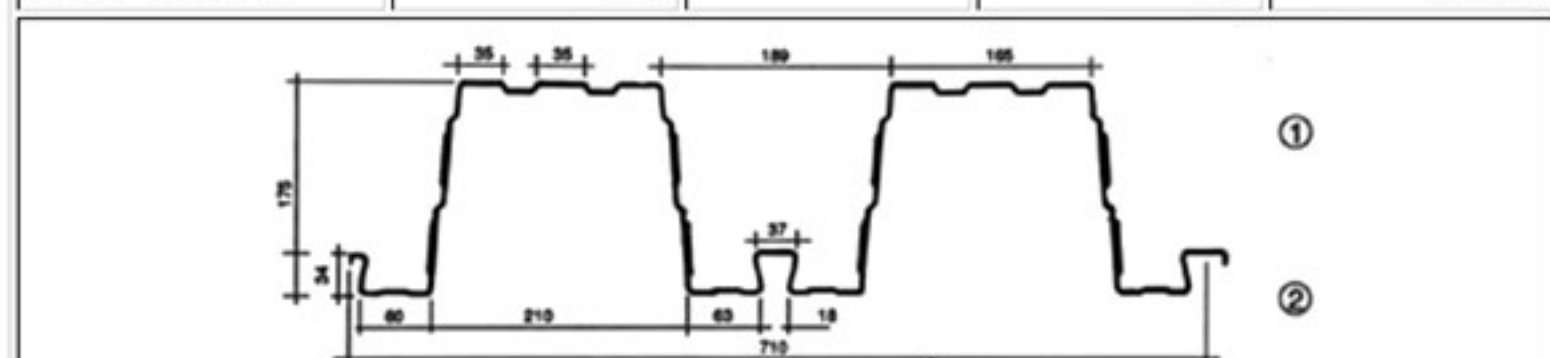

EGB 2000	710		0.8	13.26
EGB 2000	710		1.0	16.58
EGB 2000	710		1.2	19.9
EGB 2000	710		1.5	24.87

ITP-H106-BETON		IN ACCORDO CON EN 1993-1-3																																																																																																																																																																																																																																																																																																																																																																																																	
MATERIALE		S280GD-EN10346																																																																																																																																																																																																																																																																																																																																																																																																	
limite di freccia 20 mm o l / 180		rapp. raggio / spess. piega r / s = 3																																																																																																																																																																																																																																																																																																																																																																																																	
		rapp. raggio / spess. irrigid. r / s = 1																																																																																																																																																																																																																																																																																																																																																																																																	
<table border="1"> <thead> <tr> <th>S</th> <th>peso</th> <th colspan="4">SEZIONE LORDA</th> <th colspan="12">larghezza efficace appoggio 80 mm</th> </tr> <tr> <th>mm</th> <th>kg/m²</th> <th>J_y</th> <th>W_{el,yf}</th> <th>W_{el,yb}</th> <th>W_p</th> <th colspan="12">P = qN/m²</th> </tr> <tr> <th></th> <th></th> <th>cm⁴/m</th> <th>cm³/m</th> <th>cm³/m</th> <th>cm³/m</th> <th>l = m</th> <th>1,5</th> <th>1,75</th> <th>2</th> <th>2,25</th> <th>2,5</th> <th>2,75</th> <th>3</th> <th>3,25</th> <th>3,5</th> <th>3,75</th> <th>4</th> <th>4,25</th> <th>4,5</th> <th>4,75</th> <th>5</th> <th>5,25</th> <th>5,5</th> <th>5,75</th> <th>6</th> </tr> </thead> <tbody> <tr><td>0,7</td><td>9,42</td><td>148,33</td><td>22,56</td><td>36,85</td><td>34,57</td><td>607</td><td>692</td><td>602</td><td>537</td><td>482</td><td>437</td><td>367</td><td>307</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>0,8</td><td>10,75</td><td>169,00</td><td>25,71</td><td>41,98</td><td>39,58</td><td>1073</td><td>918</td><td>803</td><td>713</td><td>623</td><td>513</td><td>428</td><td>363</td><td>313</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1</td><td>13,55</td><td>211,19</td><td>32,13</td><td>52,45</td><td>49,96</td><td>1305</td><td>1305</td><td>1290</td><td>1045</td><td>845</td><td>695</td><td>585</td><td>500</td><td>425</td><td>360</td><td>338</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1,2</td><td>16,33</td><td>251,43</td><td>38,25</td><td>62,43</td><td>60,09</td><td>1308</td><td>1308</td><td>1308</td><td>1308</td><td>1078</td><td>883</td><td>743</td><td>633</td><td>547</td><td>469</td><td>418</td><td>347</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1,5</td><td>20,69</td><td>311,31</td><td>47,37</td><td>77,26</td><td>75,61</td><td>1311</td><td>1311</td><td>1311</td><td>1311</td><td>1311</td><td>1181</td><td>986</td><td>846</td><td>724</td><td>607</td><td>497</td><td>406</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>		S	peso	SEZIONE LORDA				larghezza efficace appoggio 80 mm												mm	kg/m ²	J _y	W _{el,yf}	W _{el,yb}	W _p	P = qN/m ²														cm ⁴ /m	cm ³ /m	cm ³ /m	cm ³ /m	l = m	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	3,75	4	4,25	4,5	4,75	5	5,25	5,5	5,75	6	0,7	9,42	148,33	22,56	36,85	34,57	607	692	602	537	482	437	367	307													0,8	10,75	169,00	25,71	41,98	39,58	1073	918	803	713	623	513	428	363	313												1	13,55	211,19	32,13	52,45	49,96	1305	1305	1290	1045	845	695	585	500	425	360	338										1,2	16,33	251,43	38,25	62,43	60,09	1308	1308	1308	1308	1078	883	743	633	547	469	418	347									1,5	20,69	311,31	47,37	77,26	75,61	1311	1311	1311	1311	1311	1181	986	846	724	607	497	406									<table border="1"> <thead> <tr> <th>S</th> <th>peso</th> <th colspan="4">SEZIONE LORDA</th> <th colspan="12">larghezza efficace appoggio 80 mm</th> </tr> <tr> <th>mm</th> <th>kg/m²</th> <th>J_y</th> <th>W_{el,yf}</th> <th>W_{el,yb}</th> <th>W_p</th> <th colspan="12">P = qN/m²</th> </tr> <tr> <th></th> <th></th> <th>cm⁴/m</th> <th>cm³/m</th> <th>cm³/m</th> <th>cm³/m</th> <th>l = m</th> <th>1,5</th> <th>1,75</th> <th>2</th> <th>2,25</th> <th>2,5</th> <th>2,75</th> <th>3</th> <th>3,25</th> <th>3,5</th> <th>3,75</th> <th>4</th> <th>4,25</th> <th>4,5</th> <th>4,75</th> <th>5</th> <th>5,25</th> <th>5,5</th> <th>5,75</th> <th>6</th> </tr> </thead> <tbody> <tr><td>0,7</td><td>9,42</td><td>148,33</td><td>22,56</td><td>36,85</td><td>34,57</td><td>627</td><td>427</td><td>357</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>0,8</td><td>10,75</td><td>169,00</td><td>25,71</td><td>41,98</td><td>39,58</td><td>678</td><td>548</td><td>458</td><td>383</td><td>328</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1</td><td>13,55</td><td>211,19</td><td>32,13</td><td>52,45</td><td>49,96</td><td>1020</td><td>820</td><td>680</td><td>570</td><td>485</td><td>415</td><td>355</td><td>320</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1,2</td><td>16,33</td><td>251,43</td><td>38,25</td><td>62,43</td><td>60,09</td><td>1308</td><td>1103</td><td>913</td><td>763</td><td>643</td><td>553</td><td>478</td><td>418</td><td>373</td><td>328</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1,5</td><td>20,69</td><td>311,31</td><td>47,37</td><td>77,26</td><td>75,61</td><td>1311</td><td>1311</td><td>1271</td><td>1051</td><td>886</td><td>756</td><td>651</td><td>571</td><td>501</td><td>448</td><td>396</td><td>356</td><td>321</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>		S	peso	SEZIONE LORDA				larghezza efficace appoggio 80 mm												mm	kg/m ²	J _y	W _{el,yf}	W _{el,yb}	W _p	P = qN/m ²														cm ⁴ /m	cm ³ /m	cm ³ /m	cm ³ /m	l = m	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	3,75	4	4,25	4,5	4,75	5	5,25	5,5	5,75	6	0,7	9,42	148,33	22,56	36,85	34,57	627	427	357																		0,8	10,75	169,00	25,71	41,98	39,58	678	548	458	383	328																1	13,55	211,19	32,13	52,45	49,96	1020	820	680	570	485	415	355	320													1,2	16,33	251,43	38,25	62,43	60,09	1308	1103	913	763	643	553	478	418	373	328											1,5	20,69	311,31	47,37	77,26	75,61	1311	1311	1271	1051	886	756	651	571	501	448	396	356	321							
S	peso	SEZIONE LORDA				larghezza efficace appoggio 80 mm																																																																																																																																																																																																																																																																																																																																																																																													
mm	kg/m ²	J _y	W _{el,yf}	W _{el,yb}	W _p	P = qN/m ²																																																																																																																																																																																																																																																																																																																																																																																													
		cm ⁴ /m	cm ³ /m	cm ³ /m	cm ³ /m	l = m	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	3,75	4	4,25	4,5	4,75	5	5,25	5,5	5,75	6																																																																																																																																																																																																																																																																																																																																																																										
0,7	9,42	148,33	22,56	36,85	34,57	607	692	602	537	482	437	367	307																																																																																																																																																																																																																																																																																																																																																																																						
0,8	10,75	169,00	25,71	41,98	39,58	1073	918	803	713	623	513	428	363	313																																																																																																																																																																																																																																																																																																																																																																																					
1	13,55	211,19	32,13	52,45	49,96	1305	1305	1290	1045	845	695	585	500	425	360	338																																																																																																																																																																																																																																																																																																																																																																																			
1,2	16,33	251,43	38,25	62,43	60,09	1308	1308	1308	1308	1078	883	743	633	547	469	418	347																																																																																																																																																																																																																																																																																																																																																																																		
1,5	20,69	311,31	47,37	77,26	75,61	1311	1311	1311	1311	1311	1181	986	846	724	607	497	406																																																																																																																																																																																																																																																																																																																																																																																		
S	peso	SEZIONE LORDA				larghezza efficace appoggio 80 mm																																																																																																																																																																																																																																																																																																																																																																																													
mm	kg/m ²	J _y	W _{el,yf}	W _{el,yb}	W _p	P = qN/m ²																																																																																																																																																																																																																																																																																																																																																																																													
		cm ⁴ /m	cm ³ /m	cm ³ /m	cm ³ /m	l = m	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	3,75	4	4,25	4,5	4,75	5	5,25	5,5	5,75	6																																																																																																																																																																																																																																																																																																																																																																										
0,7	9,42	148,33	22,56	36,85	34,57	627	427	357																																																																																																																																																																																																																																																																																																																																																																																											
0,8	10,75	169,00	25,71	41,98	39,58	678	548	458	383	328																																																																																																																																																																																																																																																																																																																																																																																									
1	13,55	211,19	32,13	52,45	49,96	1020	820	680	570	485	415	355	320																																																																																																																																																																																																																																																																																																																																																																																						
1,2	16,33	251,43	38,25	62,43	60,09	1308	1103	913	763	643	553	478	418	373	328																																																																																																																																																																																																																																																																																																																																																																																				
1,5	20,69	311,31	47,37	77,26	75,61	1311	1311	1271	1051	886	756	651	571	501	448	396	356	321																																																																																																																																																																																																																																																																																																																																																																																	
<table border="1"> <thead> <tr> <th>S</th> <th>peso</th> <th colspan="4">SEZIONE LORDA</th> <th colspan="12">larghezza efficace appoggio 80 mm</th> </tr> <tr> <th>mm</th> <th>kg/m²</th> <th>J_y</th> <th>W_{el,yf}</th> <th>W_{el,yb}</th> <th>W_p</th> <th colspan="12">P = qN/m²</th> </tr> <tr> <th></th> <th></th> <th>cm⁴/m</th> <th>cm³/m</th> <th>cm³/m</th> <th>cm³/m</th> <th>l = m</th> <th>1,5</th> <th>1,75</th> <th>2</th> <th>2,25</th> <th>2,5</th> <th>2,75</th> <th>3</th> <th>3,25</th> <th>3,5</th> <th>3,75</th> <th>4</th> <th>4,25</th> <th>4,5</th> <th>4,75</th> <th>5</th> <th>5,25</th> <th>5,5</th> <th>5,75</th> <th>6</th> </tr> </thead> <tbody> <tr><td>0,7</td><td>9,42</td><td>148,33</td><td>22,56</td><td>36,85</td><td>34,57</td><td>657</td><td>452</td><td>377</td><td>317</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>0,8</td><td>10,75</td><td>169,00</td><td>25,71</td><td>41,98</td><td>39,58</td><td>713</td><td>578</td><td>483</td><td>408</td><td>348</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1</td><td>13,55</td><td>211,19</td><td>32,13</td><td>52,45</td><td>49,96</td><td>1076</td><td>866</td><td>720</td><td>605</td><td>515</td><td>445</td><td>385</td><td>340</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1,2</td><td>16,33</td><td>251,43</td><td>38,25</td><td>62,43</td><td>60,09</td><td>1308</td><td>1168</td><td>968</td><td>808</td><td>688</td><td>588</td><td>513</td><td>448</td><td>398</td><td>353</td><td>318</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>1,5</td><td>20,69</td><td>311,31</td><td>47,37</td><td>77,26</td><td>75,61</td><td>1311</td><td>1311</td><td>1311</td><td>1116</td><td>941</td><td>806</td><td>696</td><td>606</td><td>536</td><td>476</td><td>426</td><td>381</td><td>346</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>		S	peso	SEZIONE LORDA				larghezza efficace appoggio 80 mm												mm	kg/m ²	J _y	W _{el,yf}	W _{el,yb}	W _p	P = qN/m ²														cm ⁴ /m	cm ³ /m	cm ³ /m	cm ³ /m	l = m	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	3,75	4	4,25	4,5	4,75	5	5,25	5,5	5,75	6	0,7	9,42	148,33	22,56	36,85	34,57	657	452	377	317																	0,8	10,75	169,00	25,71	41,98	39,58	713	578	483	408	348																1	13,55	211,19	32,13	52,45	49,96	1076	866	720	605	515	445	385	340													1,2	16,33	251,43	38,25	62,43	60,09	1308	1168	968	808	688	588	513	448	398	353	318										1,5	20,69	311,31	47,37	77,26	75,61	1311	1311	1311	1116	941	806	696	606	536	476	426	381	346								<p>I valori delle tabelle sono stati determinati utilizzando il software STA.DATA - Torino - in accordo alla EN 1993-1-3, tali valori sono da considerarsi indicativi. E' competenza del progettista/Utilizzatore procedere per i singoli casi d'impiego al relativo calcolo.</p>																																																																																																																																																																																																	
S	peso	SEZIONE LORDA				larghezza efficace appoggio 80 mm																																																																																																																																																																																																																																																																																																																																																																																													
mm	kg/m ²	J _y	W _{el,yf}	W _{el,yb}	W _p	P = qN/m ²																																																																																																																																																																																																																																																																																																																																																																																													
		cm ⁴ /m	cm ³ /m	cm ³ /m	cm ³ /m	l = m	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	3,75	4	4,25	4,5	4,75	5	5,25	5,5	5,75	6																																																																																																																																																																																																																																																																																																																																																																										
0,7	9,42	148,33	22,56	36,85	34,57	657	452	377	317																																																																																																																																																																																																																																																																																																																																																																																										
0,8	10,75	169,00	25,71	41,98	39,58	713	578	483	408	348																																																																																																																																																																																																																																																																																																																																																																																									
1	13,55	211,19	32,13	52,45	49,96	1076	866	720	605	515	445	385	340																																																																																																																																																																																																																																																																																																																																																																																						
1,2	16,33	251,43	38,25	62,43	60,09	1308	1168	968	808	688	588	513	448	398	353	318																																																																																																																																																																																																																																																																																																																																																																																			
1,5	20,69	311,31	47,37	77,26	75,61	1311	1311	1311	1116	941	806	696	606	536	476	426	381	346																																																																																																																																																																																																																																																																																																																																																																																	