


Profili normali ad "U"

Disponibile qualità S275/Fe430 ([vedi qualità acciai](#)), lunghezza standard 6 mt
a richiesta taglio a misura

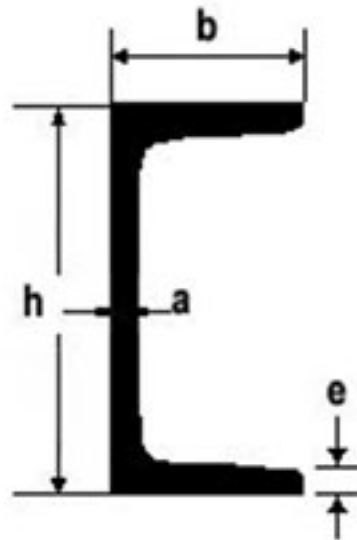

sigla	h	b	a	e	Peso
	mm	mm	mm	mm	kg/m

30	30.00	33.00	5.00	7.0	4.27
40	40.00	35.00	5.00	7.0	4.87
50	50.00	38.00	5.00	7.0	5.59
65	65.00	42.00	5.50	7.5	7.09
80	80.00	45.00	6.00	8.0	8.64
100	100.00	50.00	6.00	8.5	10.60
120	120.00	55.00	7.00	9.0	13.35
140	140.00	60.00	7.00	10.0	16.01
160	160.00	65.00	7.50	10.5	18.84
180	180.00	70.00	8.00	11.0	21.98
200	200.00	75.00	8.50	11.5	25.28
220	220.00	80.00	9.00	12.5	29.36
240	240.00	85.00	9.50	13.0	33.21
260	260.00	90.00	10.00	14.0	37.92
280	280.00	95.00	10.00	15.0	41.84
300	300.00	100.00	10.00	16.0	46.16
320	320.00	100.00	14.00	17.5	59.50
350	350.00	100.00	14.00	16.0	60.60
380	380.00	102.00	13.50	16.0	63.10
400	400.00	110.00	14.00	18.0	71.80