


Travi HEA

Disponibile qualità S275/Fe430 ([vedi qualità acciai](#)), lunghezza standard 6-12 mt
a richiesta taglio a misura

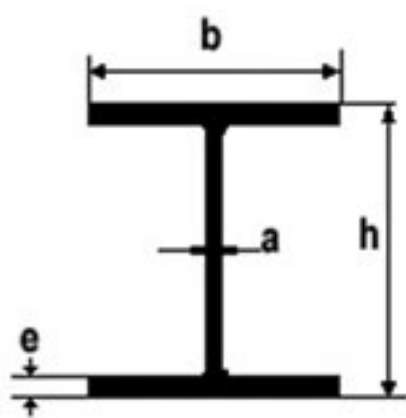

sigla	Misure				Peso kg/m
	h mm	b mm	a mm	e mm	
100	96.00	100.00	5.00	8.0	16.70
120	114.00	120.00	5.00	8.0	19.90
140	133.00	140.00	5.50	8.5	24.70
160	152.00	160.00	6.00	9.0	30.40
180	171.00	180.00	6.00	9.5	35.50
200	190.00	200.00	6.50	10.0	42.30
220	210.00	220.00	7.00	11.0	50.50
240	230.00	240.00	7.50	12.0	60.30
260	250.00	260.00	7.50	12.5	68.20
280	270.00	280.00	8.00	13.0	76.40
300	290.00	300.00	8.50	14.0	88.30
320	310.00	300.00	9.00	15.5	97.60
340	330.00	300.00	9.50	16.5	105.00
360	350.00	300.00	10.00	17.5	112.00
400	390.00	300.00	11.00	19.0	125.00
450	440.00	300.00	11.50	21.0	140.00
500	490.00	300.00	12.00	23.0	155.00
550	540.00	300.00	12.50	24.0	166.00
600	590.00	300.00	13.00	25.0	178.00
650	640.00	300.00	13.50	26.0	190.00
700	690.00	300.00	14.50	27.0	204.00
800	790.00	300.00	15.00	28.0	224.00
900	890.00	300.00	16.00	30.0	252.00
1000	990.00	300.00	16.50	31.0	272.00