


Travi HEM

Disponibile qualità S275/Fe430 ([vedi qualità acciai](#)), lunghezza standard 6-12 mt
a richiesta taglio a misura

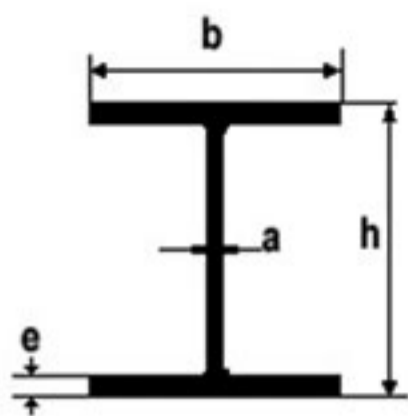

sigla	Misure				Peso
	h	b	a	e	
	mm	mm	mm	mm	kg/m
100	120.00	106.00	12.00	20.0	41.80
120	140.00	126.00	12.50	21.0	52.10
140	160.00	146.00	13.00	22.0	63.20
160	180.00	166.00	14.00	23.0	76.20
180	200.00	186.00	14.50	24.0	88.90
200	220.00	206.00	15.00	25.0	103.00
220	240.00	226.00	15.50	26.0	117.00
240	270.00	248.00	18.00	32.0	157.00
260	290.00	268.00	18.00	32.5	172.00
280	310.00	288.00	18.50	33.0	189.00
300	340.00	310.00	21.00	39.0	238.00
320	359.00	309.00	21.00	40.0	245.00
340	377.00	309.00	21.00	40.0	248.00
360	395.00	308.00	21.00	40.0	250.00
400	432.00	307.00	21.00	40.0	256.00
450	478.00	307.00	21.00	40.0	263.00
500	524.00	306.00	21.00	40.0	270.00
550	572.00	306.00	21.00	40.0	278.00
600	620.00	305.00	21.00	40.0	285.00
650	668.00	305.00	21.00	40.0	293.00
700	716.00	304.00	21.00	40.0	301.00
800	814.00	303.00	21.00	40.0	317.00
900	910.00	302.00	21.00	40.0	333.00
1000	1008.00	302.00	21.00	40.0	349.00