


# Travi IPE

Disponibile qualità S275/Fe430 ([vedi qualità acciai](#)), lunghezza standard 6-12 mt  
a richiesta taglio a misura

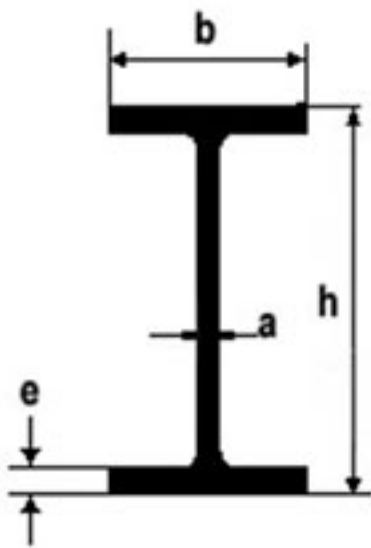

| Misure |     |       |      | Peso   |
|--------|-----|-------|------|--------|
| h      | b   | a     | e    |        |
| mm     | mm  | mm    | mm   | kg/m   |
| 80     | 46  | 3.80  | 5.2  | 6.00   |
| 100    | 55  | 4.10  | 5.7  | 8.10   |
| 120    | 64  | 4.40  | 6.3  | 10.40  |
| 140    | 73  | 4.70  | 6.9  | 12.90  |
| 160    | 82  | 5.00  | 7.4  | 15.80  |
| 180    | 91  | 5.30  | 8.0  | 18.80  |
| 200    | 100 | 5.60  | 8.5  | 22.40  |
| 220    | 110 | 5.90  | 9.2  | 26.20  |
| 240    | 120 | 6.20  | 9.8  | 30.70  |
| 270    | 135 | 6.60  | 10.2 | 36.10  |
| 300    | 150 | 7.10  | 10.7 | 42.20  |
| 330    | 160 | 7.50  | 11.5 | 49.10  |
| 360    | 170 | 8.00  | 12.7 | 57.10  |
| 400    | 180 | 8.60  | 13.5 | 66.30  |
| 450    | 190 | 9.40  | 14.6 | 77.60  |
| 500    | 200 | 10.20 | 16.0 | 90.70  |
| 550    | 210 | 11.10 | 17.2 | 106.00 |
| 600    | 220 | 12.00 | 19.0 | 122.00 |